

Header 6

LCD TFT

1	LCD_SCL
2	LCD_SDO
3	LCD_RST
4	LCD_CS

CON4

接蜂鸣器时：R25阻值为100R、R50阻值为100K
接喇叭时：R25阻值为0R、R50阻值为10R

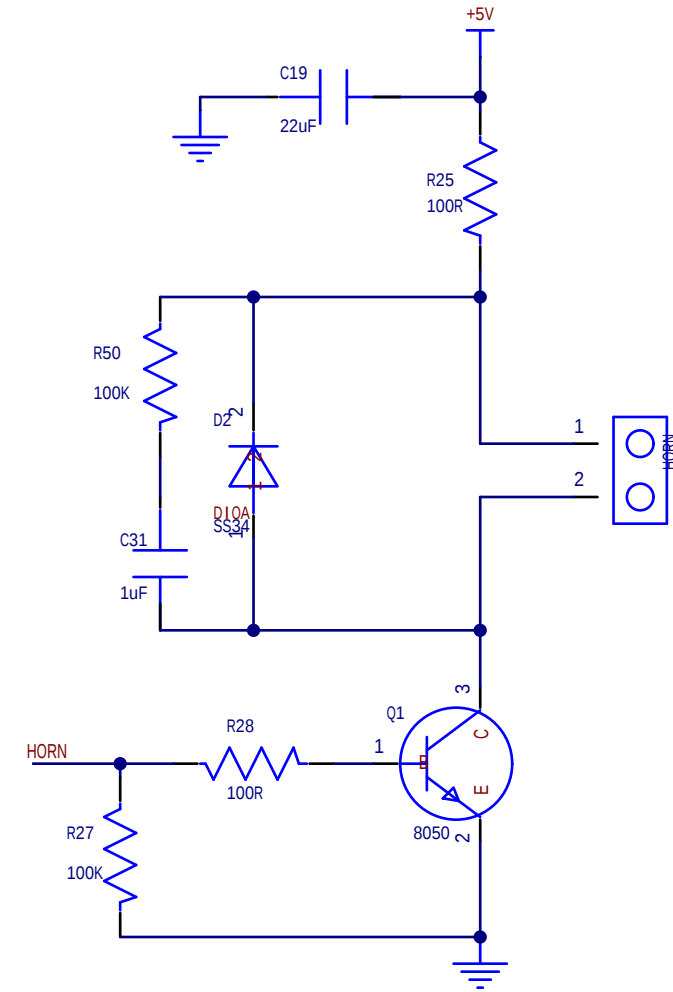
[illegible][illegible]

Diagram showing the connections for COM5:

- Pin 1: /NRST
- Pin 2: SWIO
- Pin 3: SWCLK
- Pin 4: GND
- Pin 5: MCU_3.3V

[illegible]

若需要使用GINT14输出PWM模拟晶振则焊接R12、C16不焊Y3
若使用实体晶振焊接Y3不焊R12、C16

[illegible]